

## **Condensate Return Feedwater Systems For Low and High Pressure Steam Boilers**

Rite's feedwater return systems are engineered for the safe and efficient storage and pumping of condensate and make-up water back to the boiler. Why Rite? Because all our receivers are made from 3/8" PVQ steel, which is up to double the thickness of other receivers. With corrosion as the number one reason why return tanks wear out and need replacing – Rite Condensate Return Systems offer up to twice the service life of other brands. With standard receiver capacities from 46 to 250 gallons and simplex to triplex pump sets, Rite has a return system for virtually any requirement. Check out our other standard features below and see why one choice stands out – the Rite Choice.

- Long-lasting 3/8" (.375) steel tank construction. Up to twice the head and shell thickness of other receivers for superior corrosion resistance.
- Vented, non-pressurized tank.
- Large 5" diameter cleanout facilitates sediment removal from receiver.
- Standard feedwater pumps are high performace Burks turbine or Goulds multistage centrifugal for long service life.
- NPSH suction piping to pumps includes shut-off valve and wve strainer.
- Automatic water make-up valve is float operated and mounted on top of the tank with built-in air gap provision. Eliminates the need for a backflow preventer.







- Sparge tube connection for preheating make-up water.
- Sight glass with brass gauge glass valves and rod protectors.
- Industrial grade thermometer.
- Structural steel base with anchor holes.
- Forklift skid design.
- Balanced lifting lug.
- Finished with super tuff metallic blue polyurethane paint.



# Condensate Return Feedwater Systems Data & Dimensions

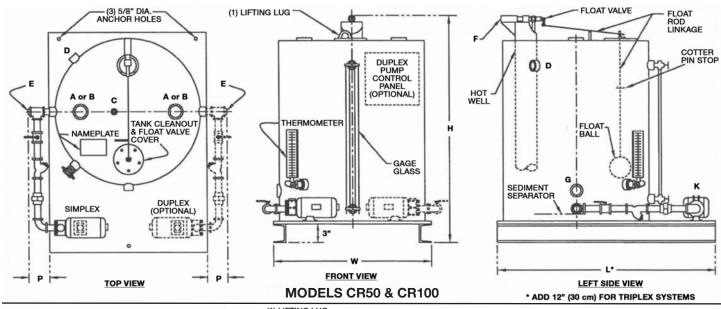

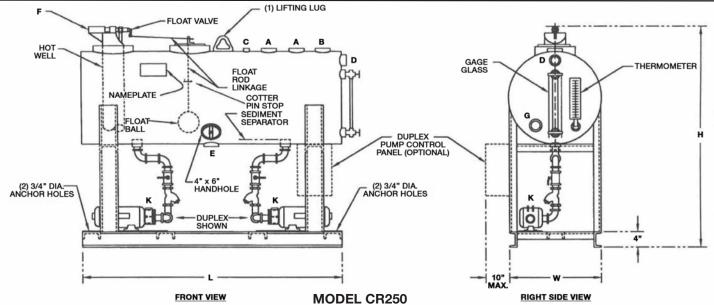

REF.	DESCRIPTION	CR50	CR100	CR250
Α	CONDENSATE RETURN	2" FNPT	2" FNPT	(2) 2" FNPT
В	VENT TO OUTDOORS	2" FNPT	2" FNPT	2" FNPT
С	SPARGE TUBE CONNECTION (IF USED)	1/2" FNPT	1/2" FNPT	1/2" FNPT
D	OVERFLOW	1" FNPT	1" FNPT	1 1/4" FNPT
Е	TANK DRAIN	1" FNPT	1" FNPT	2" FNPT
F	SOFT WATER MAKE UP	1/2" FNPT	1/2" FNPT	1/2" FNPT
G	SPARGE TUBE REGULATING VALVE TEMPERATURE SENSOR	1" FNPT	1" FNPT	1" FNPT
K	BOILER FEED PUMP DISCHARGE	1" FNPT	1" FNPT	(2) 1/4" FNPT
L	LENGTH INCHES (cm)	36" (91 cm)*	48.5" (123 cm)*	63" (160 cm)
W	WIDTH INCHES (cm)	26" (66 cm)	38" (97 cm)	36" (91 cm)
Н	HEIGHT INCHES (cm)	38" (97 cm)	38" (97 cm)	70" (178 cm)
Р	PIPING (REMOVABLE) INCHES (cm)	9 1/2" (24 cm)	7" (18 cm)	N/A
RETURN TANK CAPACITY TO OVERFLOW GALLONS (LITERS)		46 GAL. (175 L)	104 GAL. (395 L)	240 GAL. (912 L)
SHIPPING WEIGHT APPROXIMATE POUNDS (KILOGRAMS)		495 LBS (223 KG)	825 LBS (371 KG)	1465 LBS (695 KG)
MAXIMUM OPERATING WEIGHT POUNDS (KILOGRAMS) (TANK FLOODED)		877 LBS (395 KG)	1688 LBS (760 KG)	3457 LBS (1556 KG)
SUGGESTED MAX. BOILER HORSEPOWER CAPACITY		50	100	250
MAXIMUM OPERATING FEEDWATER TEMPERATURE °F (°C)		225° F (107° C)	225° F (107° C)	225° F (107° C)

\* If supplied. Rev. 2/2014



Condensate Return Feedwater Systems
Options



### **RECEIVING**

Carefully inspect the equipment for any damage before signing bill of lading. Make sure the copper float ball inside the receiver (tank) has not come loose during shipment.

### **MAINTENANCE**


Clean the pump suction wye strainer screen every 6 months. Clean out sediment from the bottom of the tank every few years as required. Be sure make-up valve shuts off tightly (no drips) when the float reaches its upward travel limit. If the tank overflows due to condensate return, adjust the float valve linkage to lower the make-up water level. Check float valve linkages every six months to be sure connections are tight. Lubricate float rod where it passes through guide bushing into tank every 6 months with WD-40 and make sure the rod is straight and travels smoothly between the stops. Make sure there is no stray voltage between the tank and ground. As little as 3 millivolts may cause electrolysis which can lead to premature tank corrosion.

#### **TROUBLESHOOTING**

If pump runs but the boiler at operating pressure doesn't fill, install a pressure gauge with the same range as the boiler's pressure gauge near the discharge of the pump as shown below. If the pump pressure fluctuates by more than a few P.S.I., the pump is probably cavitating (not getting enough water). Check the wye strainer screen, suction piping and sediment level in the bottom of the tank for any flow restrictions. If the pump pressure is constant but stays below the boiler pressure until the boiler pressure drops far enough for the pump to work, then either the check valve(s) in the feed line are failing or the pump impeller (Burks turbine only) needs to be adjusted for wear – see pump cut sheet for instructions.

#### **STORAGE - LAY-UP**

Empty tank completely using the drain fitting and a wet-dry vacuum. Remove all sediment and get the tank as dry as possible. Drain water from pump casing and leave dry. Post equipment lockout notice on receiver and pump disconnect(s).

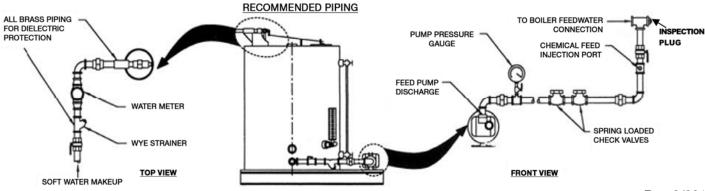



# **Condensate Return Feedwater Systems Specification and Order Form**

SN \_\_\_\_\_

Provide one Rite model CRCondensate Return Feedwater System. Steel receiver shall be 3/8" (.375") minimum head and shell nickness for corrosion resistance. Receiver (tank) shall have 2" vent connection for non-pressurized operation and shall have additional fittings for the ollowing: condensate return, sparge tube, sparge tube temperature sensor, overflow, drain, float flange cover and cleanout opening, gauge glass valves nermometer, (2) pump suction connections, and soft water makeup. All fittings shall be seal welded both inside and outside of the tank. A sediment eperator shall be incorporated into the receiver design. Receiver capacity shall be gallons.  Pump suction Piping shall be complete and consist of a wye strainer with 20-mesh stainless steel screen, brass shut-off valve and pump ange or union. The tank and suction piping shall deliver the required NPSH (net positive suction head) to the boiler feed pumps without cavitation revortexing. Pump baseplates shall be through-bolted to feedwater system base without transmitting undue stress to the pump or suction piping. Pump transgement shall be (simplex, duplex or triplex). Pump(s) shall be (make) (model)
apable of delivering GPM to a boiler operating at a maximum pressure of PSIG.
Make-up water valve shall be foat operated type and mounted on top of the tank with built-in air gap provision. It shall be readily accessible or service.
he following options shall also be required; (Click Options for pictures) Duplex pump arrangement. (2 Pumps) Triplex pump arrangement. (2 Pumps) Triplex pump arrangement. (2 Pumps) Triplex pump arrangement. (3 Pumps) Triplex pump arrangement. (3 Pumps) Triplex pump arrangement. (4 20 12" to "L" dimension of CR-50, CR-75, CR-100, and CR-150 receivers).  Panel Option # 1 — Duplex pump control panel, NEMA, with rotary hand-auto switch, pump alternator and lead-lag feature to bring on oth pumps when there is a low-water-condition. Includes rotary on-offswitches, 1" indicating lights and contactors of sufficient rating for each single-phase fractional horsepower motors have built-in ermal overload protection). Wiring to pumps shall be furnished in liquid tight conduit.  Panel Option #2 — Same as Banel Same and to come on when thou lead-lag feature. Pumps will automatically alternate each time there a call for feedware as above, but the second pump will not come on when there is a low water condition.  Panel Option # 3 — Same as Panel Option 1, except where 3 phase pump motors require IEC type motor starters with verload protection in lieu of single phase motor contactors. Specify voltage phase and cycles  Panel Option # 5 — For triplex systems feeding two boilers with dedicated pumps and a third standby pump. Features NEMA 1 panel with tarty auto-off-pump #3 switches that allow pump #3 to operate in lieu of pump #1 or #2. With 1" indicating lights and contactors for each single-phase actional horsepower pump.  Panel Option # 6 — Same as Panel Option #5, except where 3 phase pump motors require IEC type motor starters with overload rotection in lieu of single phase motor contactors. Specify voltage phase and cycles Specify NEMA Rating Early Option #6 — Same as Panel Option #6 — Specify NEMA Rating
ystem is for a Rite Model S/N A# Scheduled ship date Other lepresentative Job Name Ship to:
lequested Ship Date Purchase Order #
rice: Freight