


SCALE CONTROL FOR STEAM BOILERS

Automatic Timed Surface Blowdown

NEMA 4X Controller adjusts the frequency and duration of surface blowdown. Automatically terminates the blowdown when water conductivity drops to a preset level. Analog (shown here) or digital readout displays real time water conductivity in either microsiemens/cm or tds/ppm values during blowdown.

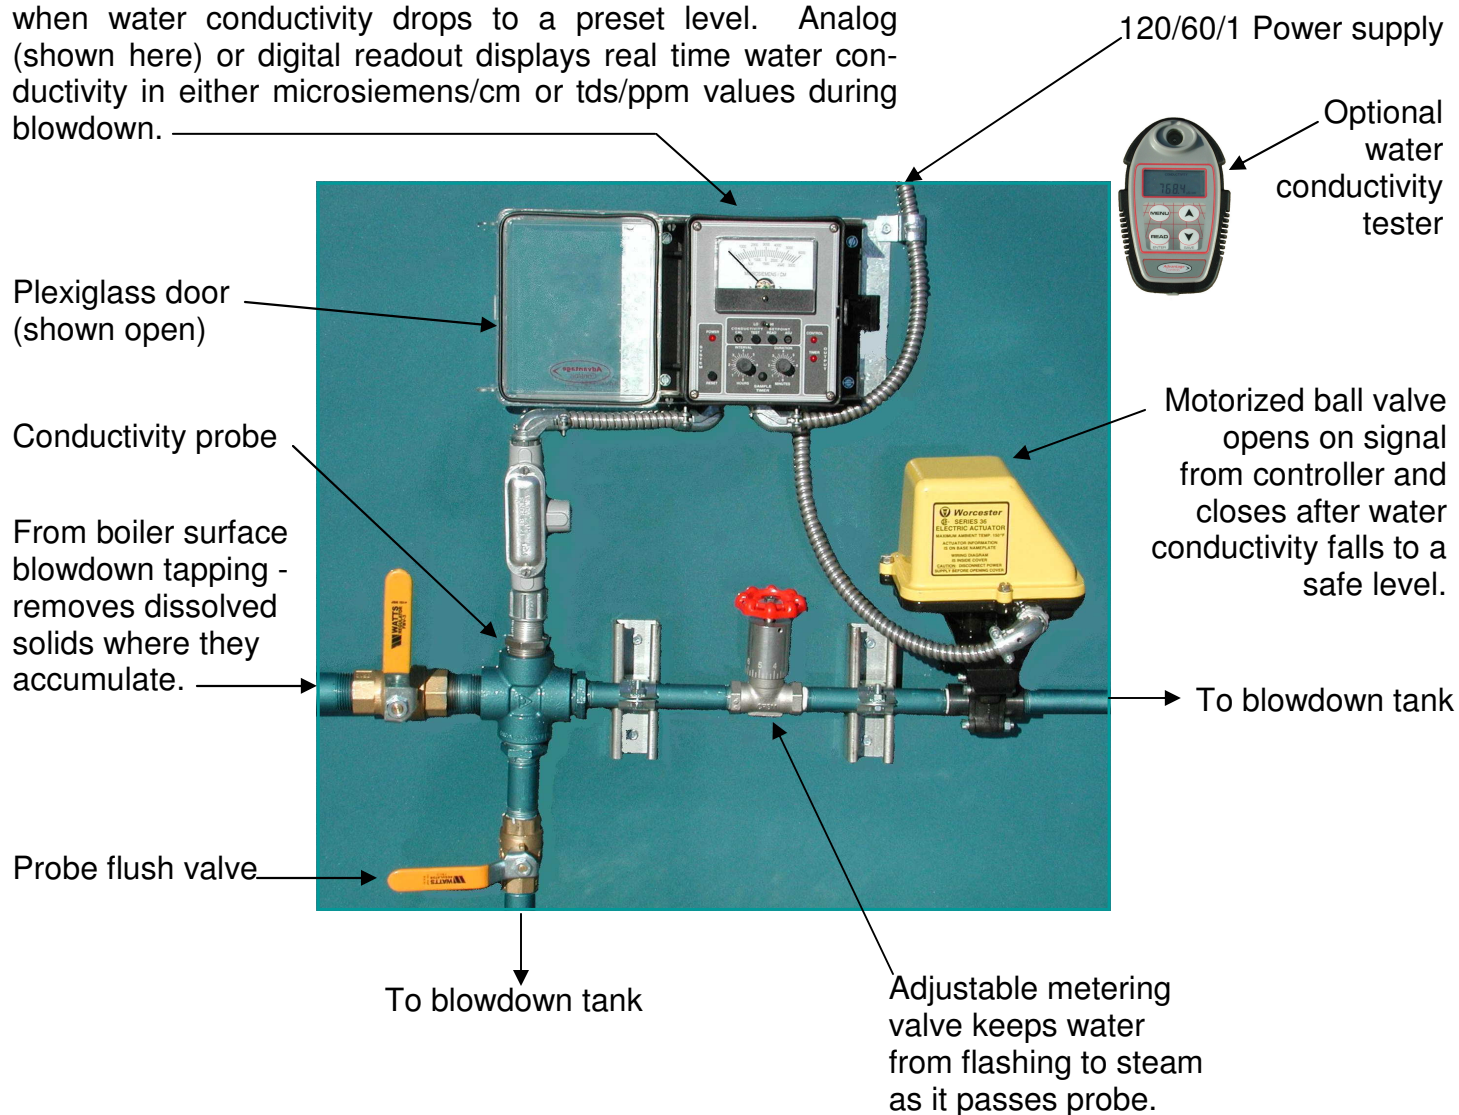

- Available factory installed or retrofit.
- Helps keep steam boilers scale-free and operating at peak efficiency.
- Minimal maintenance required.
- Can pay for itself in energy savings in six months.
- Perfect for installations where water treatment programs are limited.