



15 PSI Low Pressure Steam Boilers Power Burner Fired

PRODUCT DESCRIPTION

Rite Power Burner Fired Low Pressure Steam Boilers have been providing our valued customers with high quality steam safely and reliably for over forty years. From autoclaves to humidifiers, bakeries to breweries – these heavy duty watertube steamers are available in 47 different models, ranging from 480 – 12,499 MBH input (11 – 300 Boiler Horsepower) for the widest selection possible.

So simple to maintain and operate, Rite Steam Boilers feature **complete waterside access** so that virtually all scale and mud deposits can be seen and mechanically cleaned during a single scheduled maintenance shutdown. The result – **Better fuel-to-steam efficiency and lower operating cost over the life of your boiler investment.** Consider a few of our other standard features: Rite's floating heads that eliminate pressure vessel cracks and broken welds caused by thermal stress cycling (backed by our **25 Year Thermal Shock Warranty**), Rite's "superheated" drying tubes that regularly boost steam quality at the nozzle into the 99%+ range, Rite's bolted/gasketed headplates that eliminate any possibility of hydraulic explosion in the event that safety devices fail – and you have a better boiler by design.

RITE POWER BURNER FEATURES

Rite Power Burner Fired Low Pressure Steam Boilers must be specified when: Low NOx emissions are required or fuels other than natural gas will be used. While Power Burners are more expensive and use more electrical power than atmospheric, they do have one advantage: by controlling the amount of air they use for combustion, Power Burners achieve higher combustion efficiencies than atmospheric – especially at less than full fire rate.

RITE POWER BURNER FIRED BOILERS vs. "FORCED DRAFT BOILERS"

Both use Power Burners to combust the fuel, but the similarities end there. Forced draft boilers require larger fan motors to "push" the products of combustion out a sealed combustion chamber and into a positive pressure stack. Should a leak develop in the combustion chamber or stack of a forced draft boiler – potentially toxic flue gasses could escape into the boiler room.

Rite Power Burner Fired Boilers use smaller fan motors to combust the fuel only. All Rite Boilers are designed to operate with negative pressure combustion chambers and stacks, which means flue gasses are **safely** under negative draft conditions from the time the fuel is burned until they exit the stack.





15 PSI Low Pressure Steam Boilers Models & Ratings / Power Burner Fired

STACK / DRAFT REQUIREMENTS

- Type 304 stainless steel lined stack is required when equipped with #2 oil or combination gas & #2 oil burner.
- Minimum height for #2 oil or combination gas & #2 oil fired boilers is 15 ft.
- The stack should be supported independently of the boiler and an adjustable length section of stack should be installed after the barometric damper to allow for future separation. All Rite Boilers have internal stack supports to handle the weight of the stack during installation.
- Power Burner fired boilers are supplied with barometric damper (shipped loose) and a draft gauge (installed) to help set and maintain a draft between -.05" to -.09" W.C. for all fuels and firing rates.

AIR REQUIREMENTS

Adequate Combustion/Ventilation Air is vital for safe, efficient operation. Refer to the latest edition of the Uniform Mechanical Code or consult your local Building and Safety Department for specific requirements.

Warning: Do not install in a room that will develop negative pressure without utilizing a properly sized induced draft fan.

ELECTRICAL REQUIREMENTS

- A single point 1 or 3 phase supply is required to the burner panel. See separate Burner Price Lists for standard electrical power requirements.
- Separate electrical supply may be required to operate boiler feed pump.

#2 OIL SUPPLY REQUIREMENT

- Supply to oil pump: minimum gravity flow to maximum 3 psi.

FEEDWATER SYSTEMS & BLOWDOWN TANKS

Rite manufactures a complete line of Condensate Return Feedwater Tanks and Blowdown Tanks for our Steam Boilers shown below.


BOILER MODEL	Input MBH	Nominal Output		E.D.R.	Heating Surface Sq. Ft.	Flooded Water Content Gallons	Normal Water Level Content Gallons	Pounds of Steam per Hour @ 212 F	Nominal Shipping Weight (lbs)
		MBH	Boiler Horsepower						
48 SO	480	384	11	1600	49	35	25	395	1500
55 SO	550	440	13	1833	56	40	27	453	1650
63 SO	630	506	15	2108	63	45	29	519	1800
76 SO	760	608	18	2533	75	54	32	626	1950
85 SO	850	680	20	2833	88	61	49	700	2325
90 SO	900	720	21	3000	88	64	49	742	2325
105 SO	1050	840	25	3500	101	76	52	865	2750
120 SO	1200	960	28	4000	115	85	55	989	3125
135 SO	1350	1080	32	4500	131	97	58	1113	3450
150 SO	1500	1200	35	5000	145	105	60	1236	3800
165 SO	1650	1320	39	5500	159	118	64	1360	4100
180 SO	1800	1440	43	6000	174	130	68	1484	4400
200 SO	2000	1600	47	6667	192	140	74	1649	4800
A150 SO	1500	1200	35	5000	160	120	74	1236	3850
A165 SO	1650	1320	39	5500	168	128	78	1360	4050
A180 SO	1800	1440	43	6000	190	140	81	1484	4300
A200 SO	2000	1600	47	6667	205	150	84	1649	4550
225 SO	2250	1800	53	7500	230	162	87	1855	4800
250 SO	2500	2000	59	8333	252	180	92	2061	5100
275 SO	2750	2200	65	9167	273	196	96	2267	5400
300 SO	3000	2400	71	10000	295	215	100	2473	5700
325 SO	3250	2600	77	10833	318	234	105	2679	6000
350 SO	3500	2800	83	11667	340	251	110	2885	6300
375 SO	3750	3000	89	12500	362	268	115	3091	6600
400 SO	4000	3200	95	13333	383	287	125	3297	8600
425 SO	4250	3400	101	14167	405	304	129	3504	9000
450 SO	4500	3600	107	15000	428	322	132	3710	9350
475 SO	4750	3800	113	15833	450	337	135	3916	9700
500 SO	5000	4000	119	16667	473	352	140	4122	10100
550 SO	5500	4400	131	18333	526	370	147	4534	10800
600 SO	6000	4800	143	20000	574	387	158	4946	11750
A650 SO	6500	5200	155	21667	622	405	166	5359	12500
A700 SO	7000	5600	167	23333	670	430	174	5731	13200
A750 SO	7500	6000	180	25000	722	455	179	6183	13900
A400 SO	4000	3200	95	13333	390	300	165	3297	9300
A450 SO	4500	3600	107	15000	440	325	174	3710	10125
A500 SO	5000	4000	119	1667	486	345	183	4122	10950
A550 SO	5500	4400	131	18333	535	380	199	4534	12250
A600 SO	6000	4800	143	20000	584	405	207	4946	13000
650 SO	6500	5200	155	21667	632	425	215	5359	13800
700 SO	7000	5600	167	23333	680	450	223	5771	14600
750 SO	7500	6000	180	25000	730	470	232	6183	15400
840 SO	8400	6700	200	27917	800	490	399	6935	20000
940 SO	9400	7500	225	31250	900	515	419	7250	20800
1050 SO	10500	8400	250	35000	1000	540	439	8657	21600
1150 SO	11500	9200	275	38333	1100	565	459	9481	22400
1250 SO	12499	9999	300	41662	1200	590	480	10300	23000

* Add **G** for natural gas or propane, **O** for #2 oil or **GO** for combination gas & #2 oil.

Rev. 12/2013



15 PSI Low Pressure Steam Boilers Models & Dimensions / Power Burner Fired

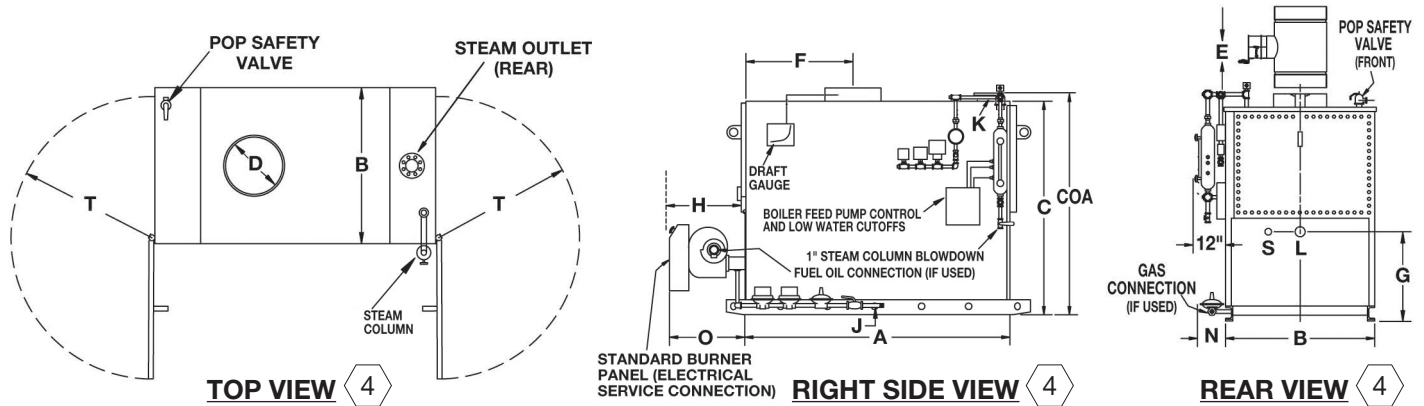

- DIMENSIONS ARE IN INCHES - SUBJECT TO PRODUCTION TOLERANCES AND CHANGE WITHOUT NOTICE. CERTIFIED DIMENSIONS AVAILABLE UPON REQUEST.
- BOILERS APPROVED FOR INSTALLATION ON NON-COMBUSTIBLE FLOORS ONLY.

- ① Barometric Dampers will be shipped one size smaller than **D** dimension for stacks up to 25 feet of vertical height (as shown below in column **E**), full size (same as **D** dimension) for stacks 25 to 50 feet tall and one size larger for stacks over 50 feet tall. Barometric Damper Tee by others.
- ② May vary - sizes shown are for UL gas trains at standard supply pressures. Gas connections are male NPT pipe thread. All other threaded connections are female NPT.
- ③ Flanges are ANSI 150 lb SA-105 flat face.
- ④ Standard right hand construction shown illustrated above. Left hand construction available at no extra charge.

BOILER MODEL	A Length Jacket	B Width Jacket	C Height Flush	COA Height Overall	D Stack Dia.	E ① Draft Control	F Stack Conn.	G	H Tube Maint.	J ② Gas Conn.	K ③ Steam Supply	L Feed Water	N Side Space	O Power Burner	S Blow Down	T Head Swing
48 SO	47	33	65	69	10	9 BARO	17	32	40	1	3 FL	1 1/4	10	26	1	20
55 SO	52	33	65	69	10	9 BARO	18	32	45	1	3 FL	1 1/4	10	26	1	20
63 SO	56	33	65	69	10	9 BARO	20	32	49	1	3 FL	1 1/4	10	26	1	20
76 SO	64	33	65	69	12	10 BARO	22	32	57	1	3 FL	1 1/4	10	26	1	20
85 SO	59	39	78	82	12	10 BARO	22	39	47	1	4 FL	1 1/2	12	26	1 1/4	26
90 SO	59	39	78	82	12	10 BARO	22	39	47	1 1/4	4 FL	1 1/2	12	26	1 1/4	26
105 SO	65	39	78	82	12	10 BARO	24	39	53	1 1/4	4 FL	1 1/2	12	26	1 1/4	26
120 SO	71	39	78	82	14	12 BARO	26	39	59	1 1/4	4 FL	1 1/2	12	31	1 1/4	26
135 SO	77	39	78	82	14	12 BARO	28	39	65	1 1/2	4 FL	1 1/2	12	31	1 1/4	26
150 SO	83	39	78	82	16	14 BARO	30	39	71	1 1/2	4 FL	1 1/2	12	31	1 1/4	26
165 SO	89	39	78	82	16	14 BARO	32	39	77	1 1/2	4 FL	1 1/2	12	31	1 1/4	26
180 SO	96	39	78	82	16	14 BARO	34	39	84	2	4 FL	1 1/2	12	31	1 1/4	26
200 SO	103	39	78	82	18	16 BARO	37	39	91	2	4 FL	1 1/2	12	31	1 1/4	26
A150 SO	69	46	84	88	16	14 BARO	29	40	53	2	5 FL	2	14	31	1 1/2	34
A165 SO	73	46	84	88	16	14 BARO	30	40	57	2	5 FL	2	14	31	1 1/2	34
A180 SO	79	46	84	88	16	14 BARO	31	40	63	2	5 FL	2	14	31	1 1/2	34
A200 SO	83	46	84	88	18	16 BARO	32	40	67	2	5 FL	2	14	31	1 1/2	34
225 SO	87	46	84	88	18	16 BARO	38	40	71	2	5 FL	2	16	31	1 1/2	34
250 SO	93	46	84	88	20	18 BARO	40	40	77	2	5 FL	2	16	35	1 1/2	34
275 SO	99	46	84	88	20	18 BARO	42	40	83	2	5 FL	2	16	35	1 1/2	34
300 SO	105	46	84	88	20	18 BARO	44	40	89	2	5 FL	2	16	35	1 1/2	34
325 SO	111	46	84	88	22	20 BARO	46	40	95	2	5 FL	2	16	35	1 1/2	34
350 SO	117	46	84	88	22	20 BARO	48	40	101	2 1/2	5 FL	2	16	35	1 1/2	34
375 SO	123	46	84	88	22	20 BARO	50	40	107	2 1/2	5 FL	2	16	35	1 1/2	34
400 SO	98	57	98	102	24	20 BARO	38	46	80	2 1/2	8 FL	2	16	35	2	45
425 SO	103	57	98	102	24	20 BARO	38	46	85	2	8 FL	2	16	35	2	45
450 SO	107	57	98	102	26	24 BARO	41	46	89	2	8 FL	2	16	35	2	45
475 SO	111	57	98	102	26	24 BARO	41	46	93	2	8 FL	2	16	35	2	45
500 SO	116	57	98	102	26	24 BARO	44	46	98	2	8 FL	2	16	35	2	45
550 SO	125	67	98	102	28	24 BARO	47	46	107	2	8 FL	2	16	35	2	45
600 SO	139	57	98	102	28	24 BARO	50	46	117	2 1/2	8 FL	2	16	35	2	45
A650 SO	149	57	98	102	28	24 BARO	53	46	127	2	8 FL	2	16	35	2	45
A700 SO	158	57	98	102	28	24 BARO	56	46	136	2	8 FL	2	16	35	2	45
A750 SO	167	57	98	102	30	28 BARO	59	46	147	2 1/2	8 FL	2	16	35	2	45
A400 SO	89	67	98	102	22	20 BARO	35	46	72	2 1/2	8 FL	2	16	35	2	56
A450 SO	97	67	98	102	24	20 BARO	38	46	80	2	8 FL	2	16	35	2	56
A500 SO	105	67	98	102	26	24 BARO	40	46	88	2	8 FL	2	16	35	2	56
A550 SO	119	67	98	102	26	24 BARO	46	46	102	2	8 FL	2	16	35	2	56
A600 SO	126	67	98	102	28	24 BARO	48	46	109	2 1/2	8 FL	2	16	35	2	56
650 SO	134	67	98	102	28	24 BARO	51	46	117	2	8 FL	2	16	35	2	56
700 SO	141	67	98	102	28	24 BARO	53	46	124	2	8 FL	2	16	35	2	56
750 SO	149	67	98	102	30	28 BARO	56	46	132	2 1/2	8 FL	2	16	35	2	56
840 SO	138	82	106	110	30	28 BARO	54	54	116	2 1/2	10 FL	2	18	42	2	69
940 SO	150	82	106	110	32	28 BARO	58	54	128	2 1/2	10 FL	2	18	42	2	69
1050 SO	162	82	106	110	34	28 BARO	62	54	140	3	12 FL	2	18	42	2	69
1150 SO	174	82	106	110	36	28 BARO	66	54	152	3	12 FL	2	18	42	2	69
1250 SO	186	82	106	110	36	28 BARO	70	54	164	3	12 FL	2	18	42	2	69

* Add **G** for natural gas or propane, **O** for #2 oil or **GO** for combination gas & #2 oil.

Rev. 12/2013